



# MOUNTING INSTRUCTIONS FOR TYPE CX3 Mini F, IEC and BNC



Above: Insert the cable to reach the stop point as shown. Turn a couple of times (3 – 5) and pull out the cable.

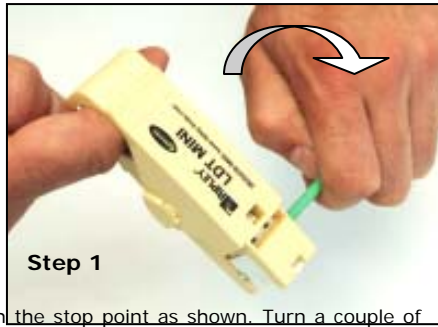


Step 1



Left: Guide for proper 6.5 mm stripping dimensions. If the tool and instructions above are being followed checking will not be necessary.

**Attention: Make sure there is no braid touching the inner conductor once the cable is stripped!**

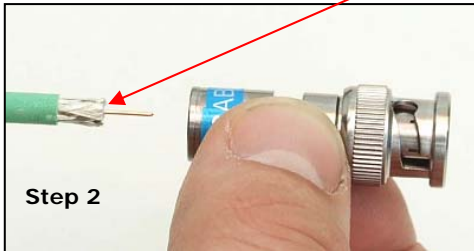

Step 2



Above: Insert the cable in the connector and push gently until the movable pin is in place (visible as shown). This operation will be the same for F, IEC and BNC connectors.



Step 3

Above: Insert the connector with the cable in the tool and close the tool handle completely. Open the handle and remove the compressed connector.

## STEP 1: Strip the cable

We strongly recommend the use of our pre adjusted LDT Mini Cable Stripper (item no. 98500995) for proper preparation of the cable.

Please read the instructions for use supplied with the tool. Make sure not to damage the braid/foil during the stripping process.

After completing the operation, the braid/foil must be smooth and the prepared cable dimensions should be as follows:

$$A = 6.5 \text{ mm} \quad \text{and} \quad B = 6.5 \text{ mm}$$

**Attention: Make sure there is no braid touching the inner conductor once the cable is stripped!**

## STEP 2: Insert the cable

Insert the cable into the connector. Leave the braid and foil attached to the dielectric as shown left (do not pull back the braid!). If the inner conductor is too long, then cut it down to a length of 6.5 mm.

Check the length against the guide as shown (not necessary if the shown tool and procedure is being followed).

## STEP 4: Compress the connector

Compress the connector using the CX3 Pocket tool. Please read the instructions supplied with the tool. Insert the connector with the cable in the tool and close the tool handle completely. Open the handle and remove the compressed connector.

Recommended Tools	Item no.
Cable Stripper LDT Mini	98500995
CX3 Pocket Tool RG 6/59 F & IEC	98029070
CX3 Pocket Tool RG 6/59 BNC	98029074
Compression tool CX3 All Size	98029072-01
Compression Tool Multimedia	98029075

Please consult our internet catalogue on [www.cabelcon.dk](http://www.cabelcon.dk) for the latest information on Corning Cabelcon connectors and tools.

Rev. 210311

Distributor:

**CABELCON**  
connectors

Corning Cabelcon ApS, Industriparken 10, DK 4760 Vordingborg  
Tel: +45 55 98 55 99 · Fax: +45 55 98 55 04  
E-mail: [cabelcon@cabelcon.dk](mailto:cabelcon@cabelcon.dk) · [www.cabelcon.dk](http://www.cabelcon.dk)