

## Description

Security video cable - 75 Ohm

LSZH UV resistant security video cable

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

VSHD70



Ø	0,70	2,90	3,00	3,40	4,30
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(LSZH)

## Class CPR acc. to UE 305/2011 (DoP)

Dca s2,d2,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Reaction to Fire

EN50575

## Construction data

Inner conductor of plain copper	(Cu)	Ø 0,70 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 2,90 ± 0,10	mm
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		73	%
Diameter over Braid		Ø 3,40	mm
Outer sheath of Thermoplastic material - blue (RAL 5015) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 4,30 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL VS HD 70 LSZH MADE IN ITALY 75 Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 CEI-UNEL 36762 C-4 (U0 = 400V) gggaan m**

(gggaan=batch number m=meter marking)

## Physical data

Weight of copper conductors	10,04	kg/km
Total weight of cable	21,66	kg/km
Minimum bending radius (single/repeated bending)	20/40	mm
Maximum cable pulling strength	80	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		45,50	Ohm/km
Outer conductor resistance		19,60	Ohm/km
Loop resistance		65,10	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current (Ieff)		3	A

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Alberto Scardovi

**Description**

Security video cable - 75 Ohm

LSZH UV resistant security video cable



Data Sheet

**VSHD70**

Maximum Operating Range analog/digital	700 / 150	m
Structural return loss (SRL)		
5 - 470 MHz	>30 dB	
470 - 1000 MHz	>28 dB	
1000 - 2000 MHz	>26 dB	
2000 - 3000 MHz	>22 dB	

Screening Attenuation (SA)	SA-Class A	Shield Transfer Impedance (Zt)	Zt-Class B
30 - 1000 MHz	>90 dB	5 - 30 MHz	< 7 mOhm/m
1000 - 2000 MHz	>75 dB		
2000 - 3000 MHz	>65 dB		


Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
2	1,60	5	2,50
3	1,90	200	13,00
4	2,20	862	27,80

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A / A Class Cable**

Cavo tipo / Cable type: VS HD 70

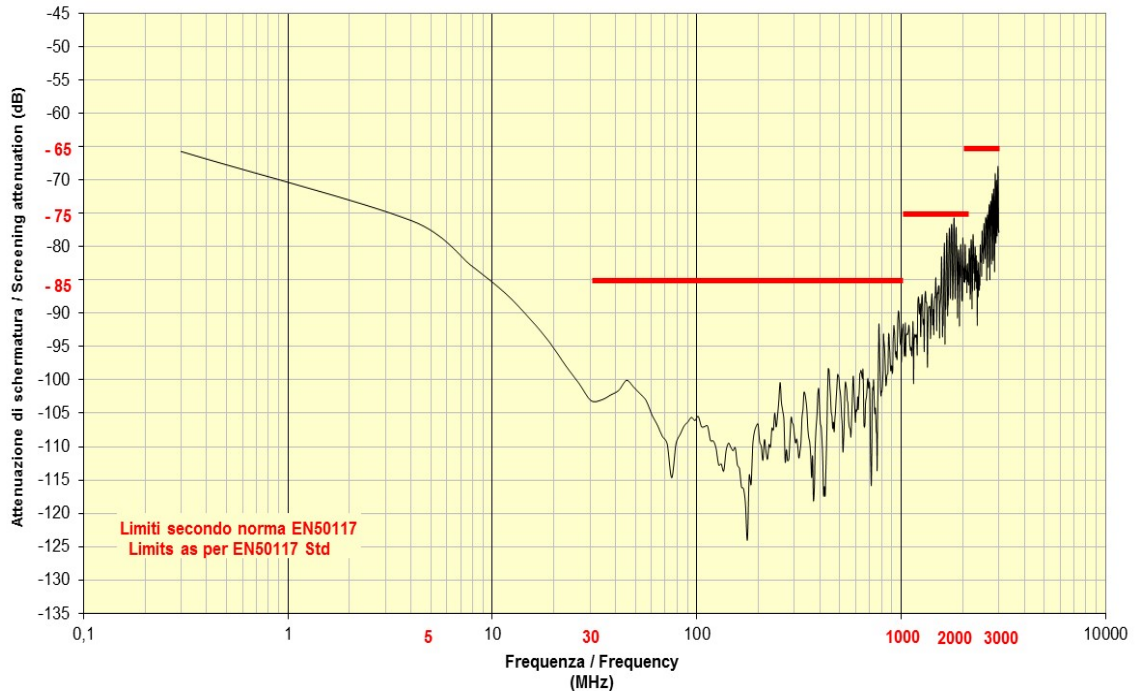

**Connectors**

- BNCC3.3C** Series BNC Compression, BNC Compression, for OUTDOOR installation
- BNCC70** Series BNC Compression, BNC Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi