

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Double shielded cable (Screening Class A++)


Coaxial Cables

CAVEL®

since 1968

Data Sheet

RP80B

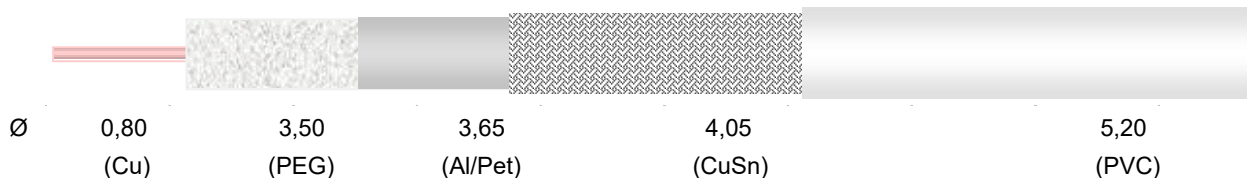

Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-4

Reaction to Fire

EN50575

Application

DOCSIS 3.1 (Data Over Coax System)

Construction data

Inner conductor of plain copper	(Cu)	Ø 0,80 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 3,50 ± 0,10	mm
Aluminum/Polyester tape longitudinally overlapped	(Al/Pet)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		79	%
Diameter over Braid		Ø 4,05	mm
Outer sheath of Polyvinylchloride - white (PVC) - lead-free	(PVC)	Ø 5,20 ± 0,10	mm
Printed each meter by blue ink-jet :			

CAVEL RP 80 B MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 Class A++ CEI-UNEL 36762 C-4 (U0 = 400V) ULTRA HD / 4K gggaa(n) m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

Physical data

Weight of copper conductors	13,67	kg/km
Total weight of cable	31,70	kg/km
Minimum bending radius (single/repeated bending)	25/50	mm
Maximum cable pulling strength	90	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		35	Ohm/km
Outer conductor resistance		11,80	Ohm/km

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Double shielded cable (Screening Class A++)



Data Sheet

RP80B

Loop resistance	46,80	Ohm/km
Sheat Insulation voltage (spark test)	2,50	kV
Maximum current (Ieff)	4	A

Structural return loss (SRL)	
5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)	SA-Class A++	Transfer Impedance (Zt)	Zt-Class A++
30 - 1000 MHz	>105 dB	5 - 30 MHz	< 0,9 mOhm/m
1000 - 2000 MHz	>100 dB		
2000 - 3000 MHz	>85 dB		


Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,90	862	24,20
10	2,60	1000	26,20
30	4,20	1750	35,30
50	5,50	2150	39,60
200	11,20	2400	42,20
300	13,90	3000	48,00
470	17,50		

Attenuazione di schermatura / Screening Attenuation

Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type: RP80B

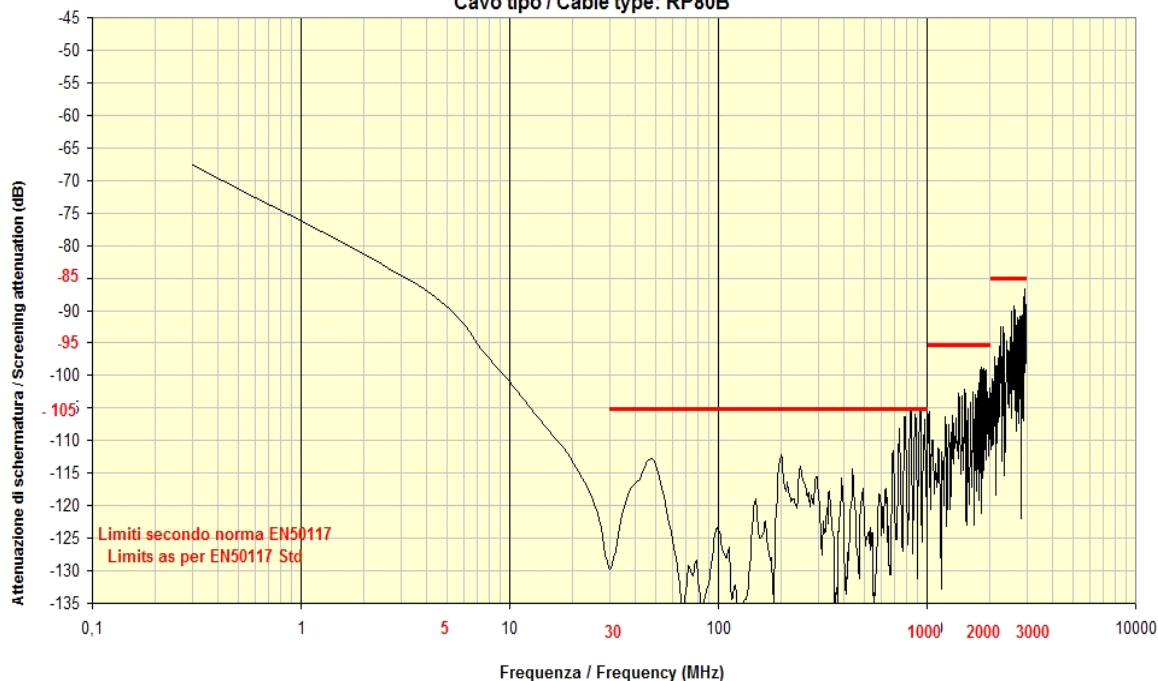

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Indoor drop coaxial cable for digital reception - 75 Ohm

Double shielded cable (Screening Class A++)

**Data Sheet****RP80B****Connectors**

BNCC3.9C	Series BNC Compression, BNC Compression, for OUTDOOR installation
BNCC501	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
F501	Series F Crimp, Crimp F-59-ALM 3.9/6.4, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
FC5.0QMS	Series F Compression, Short Quick Mount, for OUTDOOR installation
FC501	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
FCEM5.0C	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
FCPO3.9C	Series F Compression, Ø 3,9 Push-On, for OUTDOOR installation, nitin-plated brass
IECF905C	Series IEC (toolless), Ø 3,9 90° female, for INDOOR installation
IECM905C	Series IEC (toolless), Ø 3,9 90° male, for INDOOR installation

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi