


SDT

Single Drop Trimmer

U.S.PAT.No. 6,253,641

Warning: This tool is not insulated against electrical shock and should be used with electrically insulated gloves. This tool is not to be used for purposes other than intended.

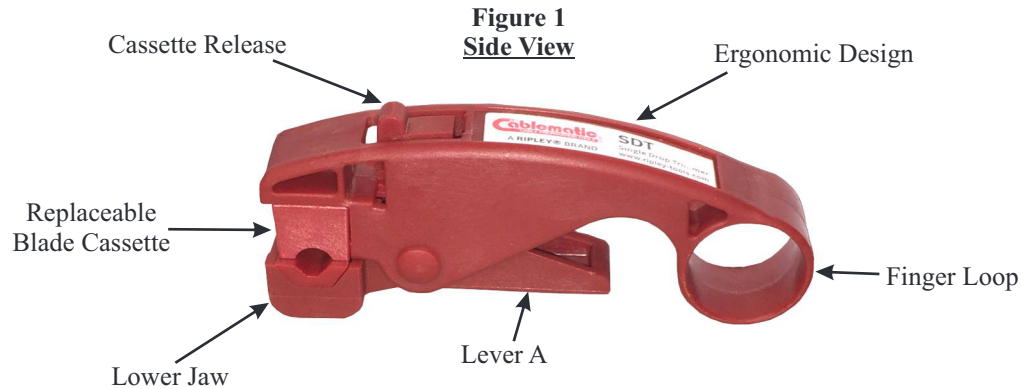


Thank you for choosing a Cablematic® tool manufactured by Ripley Tools. The proper use of this cable preparation tool will result in error free preparation of the drop cable end. In one step, both the center conductor and braid exposure lengths are prepared to SCTE and Bellcore specifications.

The Single Drop Trimmer (SDT) will perform industry specified preparations of 1/4" braid exposure on all 59, 6, 7 and 11 series drop cables. The center conductor is trimmed to approx 5/16" length on all cables. Blade cassettes are color coded and marked for easy identification of the cable size and braid exposure length. The 59/6 (red) blade cassettes are for use with all 59 or 6 series drop cable constructions and the 7 (green) blade cassettes are for use on any 7 series drop cable construction. Due to the variations of 11 series drop cable currently used in the CATV industry, there are two different 11 blade cassettes. This feature allows the user a choice of cassettes best suited for their particular cable. The 11Q (gray) blade cassette is designed for .032 (.812mm) nominal jacket thickness and is specifically for current Belden, CommScope and Times Fiber Communications 11 quad series construction. The 11 (black) blade cassette is designed for .040 (1.02mm) nominal jacket thickness and is specifically designed for all current 11 series dual and tri shield cables and Trilogy Quad shield cables.

Tool Instructions:

Insure that the proper SDT model has been selected for the cable you are stripping. Please refer to the cassette and tool ordering guide on page two of these instructions.

1. Cut the cable squarely with a side/diagonal wire cutter. Reform the cable end to a round diameter. If a messengered or siamese cable is used it may be necessary to remove the remaining webbing material for proper connectorization. This can be done with the Ripley Drop Cable Slitter (DCS).
2. Place the cable between the jaws of the tool in the direction of the arrow on bottom of tool as in Figure 2. The jaws are opened by pressing Lever A in Figure 1. Position the end of the cable to the right edge of the lower jaw as indicated in Figure 2. This will insure proper conductor length. (For tool models supplied with a built in strip stop, position the cable end to the stop on the lower jaw. This also ensures proper conductor length.

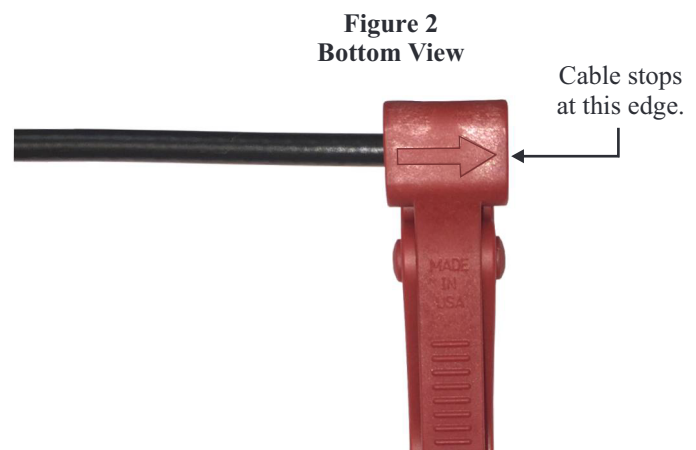


3. While continuing to hold the cable, as close to the tool as possible, with your left hand, slowly rotate the tool in a forward direction around the cable. This may be simplified by using the “finger loop” on the end of the tool. Rotate the tool 3-5 revolutions until you can no longer hear any braid or shielding being cut and/or the tool spins freely on the cable (7 and 11 cables may require more revolutions). On series 11 cable it may be necessary to set the blade before rotating the tool. This is accomplished by rotating the tool one time while squeezing the jaws. Once this is done the tool will guide itself around the cable.

4. With your right hand, firmly grasp the blade cassette area of the tool and pull the tool away from the cable end. Preparation is now complete.

5. Open the tool and discard any remaining jacket or dielectric waste material.

6. Check the trimmed cable end to ensure that the braid, dielectric and jacket are cut cleanly and that the center conductor is clean.

Single Drop Trimmer (SDT) Ordering Guide



Tool Model	Tool Part No.	Drop Cable Series	Features	Replacement Cassette	Color
SDT569-250	36700	<ul style="list-style-type: none"> RG59 Dual/Tri/Quad RG6 Dual/Tri/Quad N48 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC596-250	Red
SDT596-250SS	36700-1	<ul style="list-style-type: none"> RG59 Dual/Tri/Quad RG6 Dual/Tri/Quad N48 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Built-in 5/16" strip stop Extra cassette included 	RC596-250	Red
SDT596-250 Single	36700-2	<ul style="list-style-type: none"> RG59 Dual/Tri/Quad RG6 Dual/Tri/Quad N48 	<ul style="list-style-type: none"> 5/16 - 1/4" prep 	RC596-250	Red
SDT7-250	36701	<ul style="list-style-type: none"> RG7 Dual/Tri/Quad 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC7-250	Green
SDT11-250	36702	<ul style="list-style-type: none"> RG11 Dual/Tri/Quad 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC11-250 RC11Q-250	Black Gray
SDT11-250PB	36727	<ul style="list-style-type: none"> RG11 Pentabond 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC11-250PB	Blue
SDT COAX-9	36733	<ul style="list-style-type: none"> COAX 9 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC9-250	Green
SDT 11 TRI-250	38998	<ul style="list-style-type: none"> PPC Perfect Flex RG11 Tri 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RG11Tri-250	Green
SDT EUR	42006	<ul style="list-style-type: none"> RG59 Dual/Tri/Quad RG6 Dual/Tri/Quad N48 COAX 9 	<ul style="list-style-type: none"> 5/16 - 1/4" prep Extra cassette included 	RC-EUR-250	Orange
SDT596-025SS	43338	<ul style="list-style-type: none"> RG59 Dual/Tri/Quad RG6 Dual/Tri/Quad N48 	<ul style="list-style-type: none"> Exact 1/4 - 1/4" prep 	RC596-250	Red

Replacement Blade Cassettes (2 cassettes per package)



A RIPLEY® BRAND

WARRANTY: RIPLEY warrants its products against defective materials and workmanship for a period of one year from date of shipment from the RIPLEY factory provided the product is utilized in accordance with instructions and specified ratings.



Ripley Tools LLC
46 Nooks Hill Road, Cromwell, CT 06416

P: +1 (800) 528-8665
F: +1 (860) 635-3631

csr@ripley-tools.com
www.ripley-tools.com

Doc. No. 36707 rev5
Approval: 05-01-19