


TMS/CKR 5x6 S

Art. Number 318601

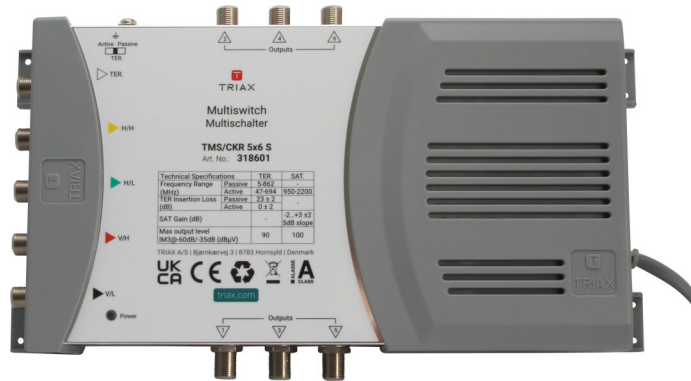

Standalone multiswitch for 1 Satellite position with 5 inputs and 6 outputs, suitable for distributing satellite and terrestrial signals in small and medium sized systems.

Dependability guaranteed: a 6-year warranty is our guarantee that TRIAX's core values of reliability and innovation are the foundation of our new multiswitches.

The TMS/CKR 5x6 S offers excellent performance and flexibility, with a compact design for installations even in confined spaces.

Excellent performance

- Low insertion loss
- High isolation
- Low power consumption
- RED compliant
- ESD Protection

Flexibility

All the functionality you need in a simplified, streamlined range:

- Easier to select the right product
- Fewer products to stock
- Quad and Quattro LNB compatible
- Active/Passive Terrestrial Switch

Convenience

Designed with installer convenience in mind:

- Equidistant F-connectors on all multiswitches
- Colour-coded input labels
- LED power indicator

Technical Specifications



Technical Specifications

ORDER INFORMATION

EAN Number 5702663186019

CHARACTERISTICS

LNB type Quad/Quattro
Max. input level - SAT (IMD3 - 35dB) | dB μ V 97 dB μ V
Max. input level - TER (IMD3 - 60dB) | dB μ V 90 dB μ V
Max. output level SAT @ -35 dB IMD3 | dB μ V 100 dB μ V
Max. output level TER @ -60dB IMD3 | dB μ V 90 dB μ V
LNB current max. | mA 1000 mA
Switch commands DiSEqC 1.0/2.0, 13/18V, 0/22kHz

FREQUENCY RANGE

Frequency range TER | MHz Active: 47...694 / Passive: 5...862 MHz
Frequency range SAT | MHz 950...2200 MHz

GAIN

Gain - SAT (with 5 dB slope) | dB $-2...+3 \pm 2$ dB
Gain - TER | dB 0 ± 2 dB

LOSS

Tap loss TER | dB 23 ± 2 dB

ISOLATION

Isolation SAT to TER | dB 30 dB
Isolation cross polarisation H/V | dB 30 dB
Isolation out-out SAT | dB 30 dB
Isolation out-out TER | dB 25 dB

RETURN LOSS

Return loss SAT inputs | dB >10 dB
Return loss TER inputs | dB >10 dB
Return loss TAP outputs | dB >10 dB

ELECTRICAL

Impedance | Ω 75 Ω

OPERATIONAL

AC Supply voltage | VAC 180...264 VAC
ESD protection 4KV inputs & sub outputs
Power Consumption (typ.) | W 3W max. TER active W
2W max. TER passive
Max. current pass per F-connector | mA 2000 mA
Max. current to each output (supplied by set top box) | mA <50 mA
Control LEDs Green LED (Power)
Temperature - operating | $^{\circ}\text{C}$ $-20...+55$ $^{\circ}\text{C}$



Technical Specifications

CONNECTORS

Connector Type	F-female
Number of inputs	5
Subscriber outputs	6
Power connector	EU main plug
Colorcoding @IF/TER inputs	VL=Black, VH=Red, HL=Green, HH=Yellow, White=TER

MECHANICAL

Main material	Steel housing
Dimensions product (H x D x W) mm	140 x 65 x 250 mm
Packing QTY	1
Product Height mm	250 mm
Product Width mm	140 mm
Product Depth mm	65 mm
Packaging Height m	0.070 m
Packaging Width m	0.300 m
Packaging Depth m	0.150 m
Packaging Volume m ³	0.000 m ³
Net Weight kg	0.725 kg
Tara Weight kg	0.151 kg
Total Weight kg	0.876 kg