




TRIAX

connecting the future

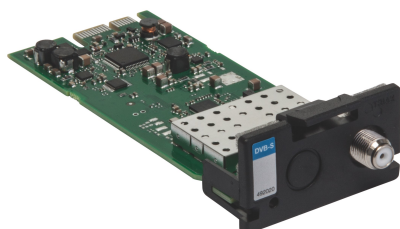

TDX Frontend - DVB-S/S2 [QPSK/8PSK]

Article number: 492020

Product description:

DVB-S/S2 input module - QPSK and 8PSK demodulator. The DVB-S module is able to receive a complete transponder. All services on the chosen frequency will be transferred to the TDX pool. Input frequency: 950-2150. Supports DiSEqC 1.1

Specifications

ORDER INFORMATION	
EAN Number	5702664920209
CHARACTERISTICS	
Demodulator Type	QPSK/8PSK
DiSEqC level	1.1
LNB LO/Hi programmable	0/22 kHz
LNB V/H programmable	0...13...18/300 V/mA
Input level	50 ... 85 dBμV
FREQUENCY	
Input frequency range	950-2150 MHz

RETURN LOSS	
Input return loss	>10 dB
ELECTRICAL	
Impedance	75 Ω
OPERATIONAL	
DC Operating voltage	12 ± 1 VDC
Temperature - operating	-10...50 °C
Temperature - storage	-20 ..70 °C
DC Current consumption	OFF 150/ON max. 450 mA
Humidity - operating	20...80 %
Humidity - storage	10...90 %
CONNECTORS	
Number of inputs	1
MECHANICAL	
Dimensions product (H x D x W)	29 x 132 x 50 mm
Packaging Depth	0,175 m
Packaging Height	0,040 m
Total Weight	0,105 kg
Packaging Width	0,075 m
Net Weight	0,075 kg
Packing QTY	1
Tara Weight	0,030 kg
Packaging Volume	0,001 m3