


WISI DM 14 A

SAT splitter, 4-way

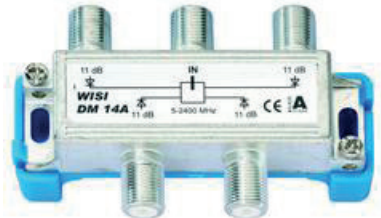

Description

The DM 14 A is a 4-way distributor which enables the symmetrical division of antenna signals on 4 lines. The integrated DC bypasses enable the pass-through of distributor voltage. The distribution attenuation is 11,5 dB. High shielding properties (class A) guarantee an interference-free transmission of the signals in the input and distribution systems.

At a glance:

- Frequency range from 5....2400 MHz
- Screening factor according to Class A
- DC-Bypass over every output
- High port isolation and return loss

Technical data

Frequency range	5...2400 MHz
Distribution loss	8...11,5 dB
Isolation	>20 dB
Return loss	18 dB

Connectors

F-socket	5 pcs. (1x input, 4x output)
----------	------------------------------

General data

Screening factor	>85 dB (class A)
DC Bypass IN/OUT 1A/30V	Yes
Dimensions (width x height x depth)	74x55x18 mm

Packaging data

Sales unit	1 pcs.
Dimensions (WxHxD) sales unit	370 x 320 x 170 mm
Packaging volume sales unit	dm ³
Gross weight sales unit	0.080 kg
Shipping unit	100 pcs.
Dimensions (WxHxD) shipping unit	mm
Packaging volume shipping package	0.2 dm ³
Gross weight shipping unit	0.08 kg
EAN	4010056165796
Article number	16579
Customs tariff number	85291095